


GROUND FLOOR PLAN - IFC

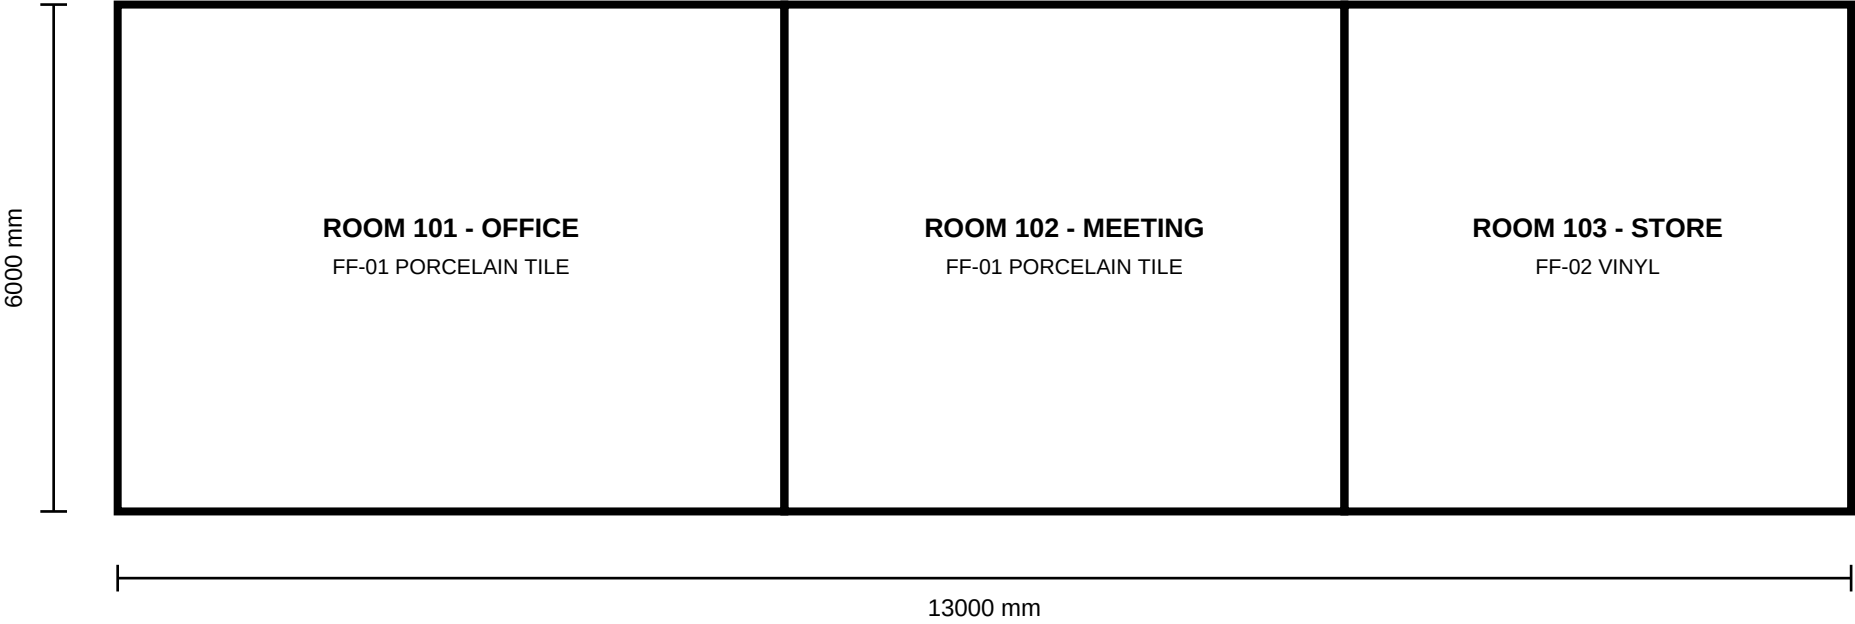

AREA AND ROOM SCHEDULE	
Gross Floor Area	78.00 m2
Net Floor Area	72.00 m2
Room Count	3
FF-01 floor finish	55.20 m2
FF-02 floor finish	16.80 m2
Evidence notes	
Areas are explicitly scheduled and reconcile to bounded room geometry.	

QUANTARA TEST ENGINEERING

ISSUED FOR CONSTRUCTION (IFC)
DRAWING: A-101 REVISION: R02
GROUND FLOOR PLAN AND AREA SCHEDULE

ARCHITECTURAL SCHEDULES - IFC

DOOR SCHEDULE

D01	900 x 2100 mm	3 No.
D02	1200 x 2100 mm	1 No.

WINDOW SCHEDULE

W01	1500 x 1200 mm	4 No.
W02	900 x 900 mm	2 No.

PARTITION SCHEDULE

P01	100 mm gypsum partition	42.00 m2
P02	150 mm block partition	18.00 m2

CEILING / WALL FINISH SCHEDULE

C01	600 x 600 acoustic ceiling	72.00 m2
WF01	Painted wall finish	168.00 m2

EXTERNAL WORKS SCHEDULE

EW01	Concrete unit paving	96.00 m2
EW02	Kerb	44.00 m

All quantities shown are explicit schedule values. No hidden or inferred construction scope is intended.

QUANTARA TEST ENGINEERING

ISSUED FOR CONSTRUCTION (IFC)
DRAWING: A-601 REVISION: R02
DOOR, WINDOW, PARTITION AND FINISH SCHEDULES